
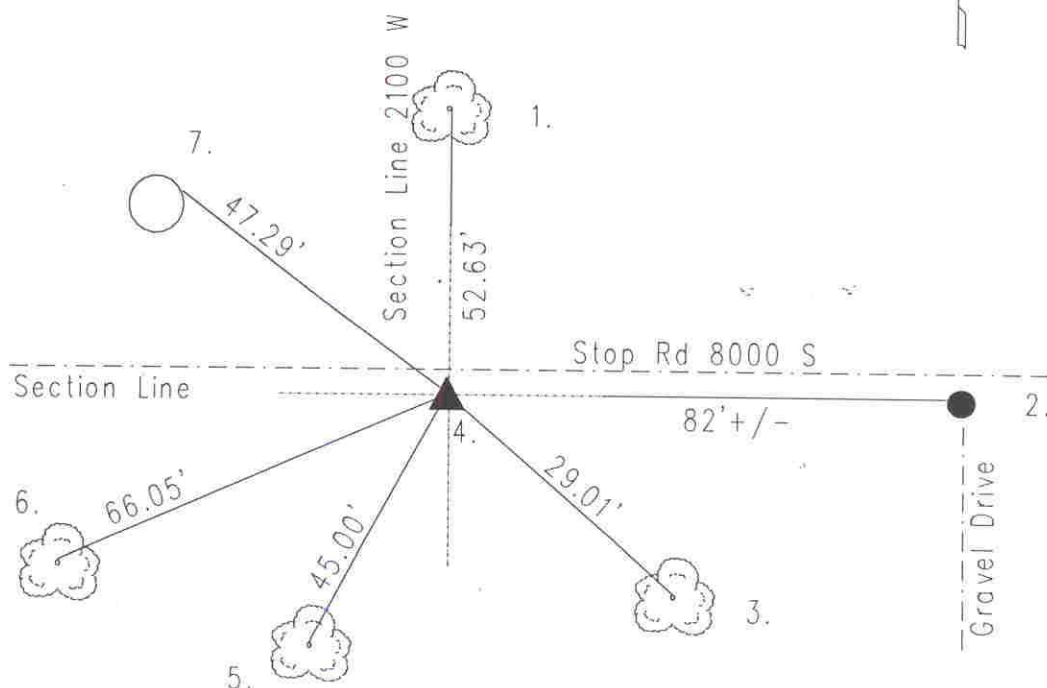


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 22 TOWNSHIP 14 RANGE 3
DATE: 7-02-01
PARTY CHIEF: Wilcoxen
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 6-4-96

IN. S.P.C. E ZONE, NAD 83
NAME: 14032201
N: 488677.1640(m)
E: 54528.2145(m)

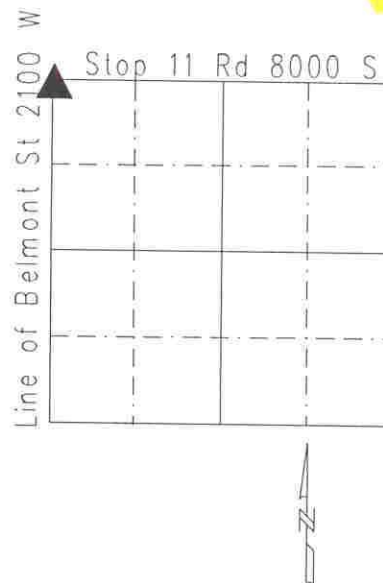

Original post set in 1820 by Laughlin with witnesses: 18" beech S 70 E 3 links, 12" dogwood N 42 W 28 links per Marion County Atlas pg. 5. Smith 1-22 & 26-1900 called stone set with no witness per Perry Township Legal Survey Book pg. 64. Monroe 10-4-60 called a steel pin over stone 2" down. McLand 5-10-70 called steel pin next to stone about 4" to the E of stone 7" dn. Spellman 6-26-75 called railroad spike at surface with stone 7" down. Steel pin found 4" down E of stone. Wilcoxen 1-13-86 called Railroad spike at surface. Excavated 4-1-96 Wilcoxen found railroad spike at surface. Steel pin found 14" down and E of stone found 18" down. Harrison set. Re-tied 4-1-96 by Kiste. Re-tied 7-2-01 by Wilcoxen.

14032201

REF.	DISTANCE	DESCRIPTION
1.	52.63'	Boat spike w/MCSO washer E thorn tree 8"up
2.	82'+/-	Due E to C/L of gravel drive ADDRESS 2011
3.	29.01'	Boat spike w/MCSO washer N 10" hackberry 6"up
4.	3.5'+/-	Due S to N of S edge of pavement
5.	45.00'	Boat spike w/MCSO washer N 12" hackberry (set above railroad spike)
6.	66.05'	Boat spike w/MCSO washer N 14" hackberry 14" up
7.	47.29'	PK nail w/MCSO washer NE pole #202 48"up